


## EtherNet/IP™ to GE Genius™ I/O Gateway AN-X3-GENI

The EtherNet/IP™ to GE Genius™ gateway allows an Allen-Bradley® Programmable Automation Controller (PAC) to control GE Genius I/O devices. This gateway allows a phased migration approach to be used when upgrading or replacing GE Genius based 90-30™ and 90-70™ controllers. The gateway provides automatic creation of the Genius scan-list and generates the associated RSLogix™ 5000 tags reducing engineering effort. Monitor mode allows verification of your conversion logic using live I/O data without impacting the running legacy system. Once the new PAC is commissioned the legacy I/O can be upgraded one module or one rack at a time as scheduled downtime is available. This gateway minimizes the risk of excessive downtime when upgrading legacy control systems.

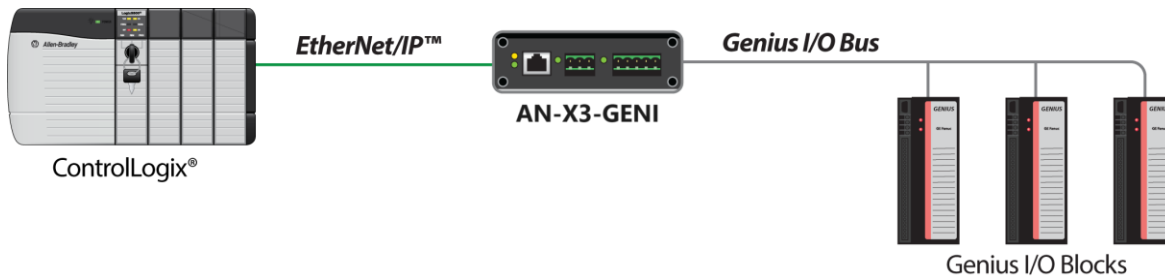

### Features

- ◆ Configures through a web browser (No separate configuration software required)
- ◆ Customizable configuration files provide additional flexibility
- ◆ Supports offline configuration through a .CSV file
- ◆ Monitor mode enables testing and verification of PAC logic before controlling physical I/O, reducing the risk of production loss due to programming errors
- ◆ View diagnostics with a web browser enabling remote monitoring and troubleshooting
- ◆ Micro SD card backs up configuration files - Can be transferred to the unit to minimize downtime in the event of a disaster

### GE Genius™ Bus Features

- ◆ Supports sending and receiving Global Data on the Genius Network
- ◆ Supports baud rates: 38.4, 76.8, and 153.6 Kbps (Standard and Extended)
- ◆ Configurable bus address
- ◆ Auto-Configuration feature discovers and maps up to 31 Genius Blocks of I/O (Online)

### EtherNet/IP™ Bus Features

- ◆ Supports up to 16 I/O connections for real time control
- ◆ Supports multicast and unicast connections
- ◆ Each connection can have a unique RPI from 2 to 750 mSec allowing the prioritization of I/O data
- ◆ Auto-Configuration feature maps the discovered GE I/O points into tags in the PAC controller
- ◆ Diagnostic data can be mapped into PAC memory making this data available to HMIs

## Hardware Specifications

Specification	Description
Ports	1 RJ45 10/100 Mbps Ethernet port 1 Phoenix 5-pin GE Genius Bus connector 1 Phoenix 3-pin power connector
Typical Power Consumption	200 mA @ 12 VDC or 100 mA @ 24 VDC
Maximum Power Dissipation	2.4W
Operating Temp	32°F to 122°F (0°C to 50°C)
Storage Temperature	-40°F to 185°F (-40°C to 85°C)
Dimensions H x D x W	4.18 x 4.97 x 1.33 in 107 x 126 x 34 mm
Humidity	5% to 95% RH, with no condensation

## Agency Approvals & Certifications

Please visit our website: [www.prosoft-technology.com](http://www.prosoft-technology.com)



Where Automation  
Connects™

## Global Distribution

ProSoft Technology® products are distributed and supported worldwide through a network of over 500 distributors in over 50 countries. Our knowledgeable distributors are familiar with your application needs. For a complete list of distributors, go to: [www.prosoft-technology.com](http://www.prosoft-technology.com)

## Ordering Information

To order this product, please use the following:

## EtherNet/IP™ to GE Genius™ I/O Gateway

AN-X3-GENI

To place an order, please contact your local ProSoft Technology distributor. For a list of ProSoft Technology distributors near you, go to: [www.prosoft-technology.com](http://www.prosoft-technology.com) and select *Where to Buy* from the menu.

Copyright © 2024 ProSoft Technology, Inc.  
All Rights Reserved. February 5, 2024  
For Public Use.

Specifications subject to change without notice.